

Potable system for outdoor application


	RX-08	RX-12
System	Two way passive	Two way passive
Components	Hi:1" driver, Low:8"	Hi:1" driver, Low:8"
Voice coil	Hi:34mm, Low:50mm	Hi:44mm, Low:50mm
Voice coil material	Copper Aluminium Wire	Copper Aluminium Wire
Magnetic material	Hi-Ferrite Low-Ferrite	Hi-Ferrite Low-Ferrite
Impedance	Hi:8Ω, Low:8Ω	Hi:8Ω, Low:8Ω
Coverage	Horizontal-90	Horizontal-90
Sensitivity	98 dB @1m/1watt	99dB @1m/1watt
Maximum SPL	120dB SPL	128dB SPL
Power handling	150watts@AES	200watts@AES
Enclosure shape	Trapezoidal	Trapezoidal
Enclosure material	Plywood	Plywood
Rigging Point	1 bolt	1 bolt
Paint	Polyurethane	Polyurethane
Finish	Texture	Texture
Dimensions(WHD)	271mmx440mmx287mm	360mmx571mmx360mm
Weight	11Kg	17.5Kg



RX-08



RX-12

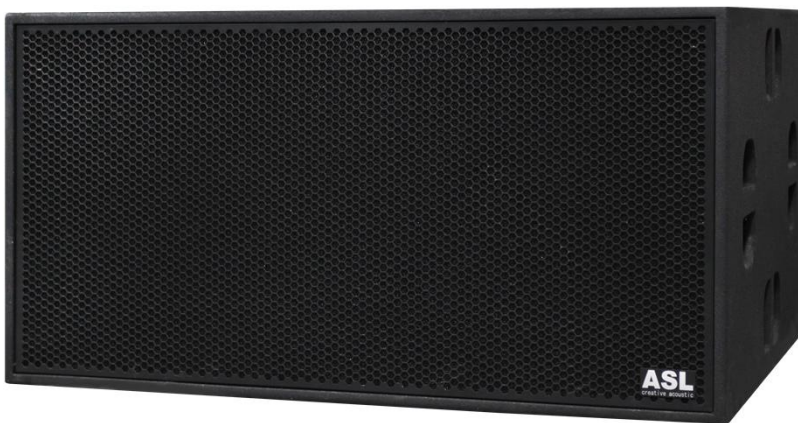

RX-218

	RX-118	RX-218
System	Subwoofer	Subwoofer
Components	18" x 1ea	18" x 2ea
Voice coil	100mm	100mm
Voice coil material	Copper Aluminium Wire	Copper Aluminium Wire
Magnetic material	Ferrite	Ferrite
Impedance	8Ω	8Ω+8Ω
Coverage	Omni	Omni
Sensitivity	99dB @1m/1watt	99dB @1m/1watt
Maximum SPL	130dB SPL	136dB SPL
Power handling	500watts@AES	1200watts@AES
Enclosure shape	Trapezoidal	Trapezoidal
Enclosure material	Plywood	Plywood
Rigging Point	1 bolt	1 bolt
Paint	Polyurethane	Polyurethane
Finish	Texture	Texture
Dimensions(WHD)	560mmx815mmx600mm	1092mmx560mmx845mm
Weight	32Kg	98Kg



RX-118