


Features

- ▶ Hi fidelity
- ▶ Installation
- ▶ Mobile application
- ▶ Easy to soldering
- ▶ Oxygen free
- ▶ Flexible skin

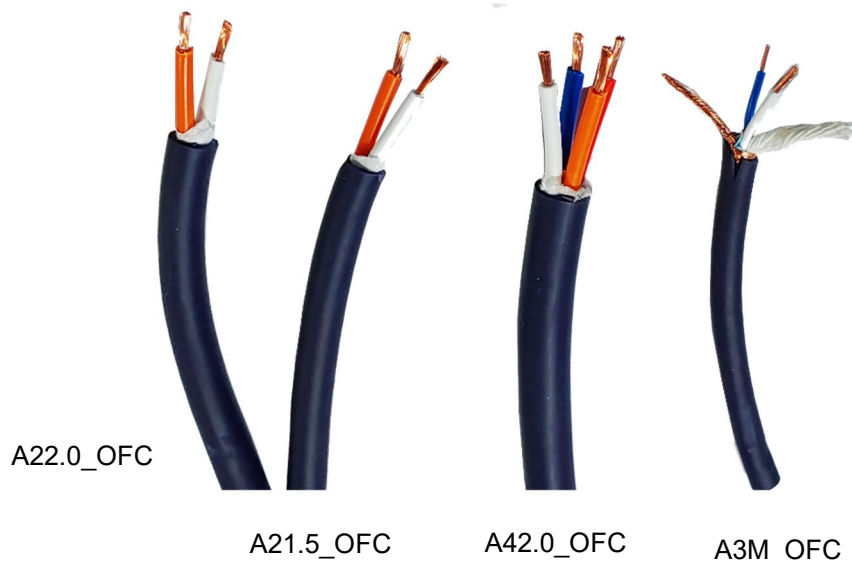

Specification

	A22.0_OFC	A21.5_OFC	A42.0_OFC	A3M_OFC
No. of conductor	2	2	4	3
Purpose	Speaker	Speaker	Speaker	Signal/mic
Total diameter	9mm	8mm	11mm	6mm
Conductor diameter	2mm			
Conductor skin	PVC	PVC	PVC	PVC
Conductor skin dia.	3.5mm	3.0mm	3.5mm	1.5mm
Conductor Skin colour	White/orange	White/orange	White/orange Red/Blue	White/blue
Skin colour	Deep blue	Deep blue	Deep blue	Deep blue
Braid shield	no	no	no	copper
Oxygen free copper	yes	yes	yes	Yes
Resistance Ω /100m	0.8	0.9	0.8	1.6
Conductor	0.1x90	0.1x60	0.1x90	0.08x50

Manufacturer ASL Co. We guarantee 5 years for all ASL products fully

Homepage www.aslaudio.co.kr Email: asl@aslaudio.co.kr / hgkim@aslaudio.co.kr

Address 900, Seongjugayasan-ro, Suryun-myeon, Seongju-gun, Gyeongsangbuk-do, Republic of Korea Post code:40064

Specifications subject to change without prior notice. All rights reserved 2020 ASL Code: N A Rev.: 20 - 0 6 / 25